

HARVIA THE WALL

HSW450400

Harvia The Wall heater was created with a focus on functionality. Illuminated operating switches, easy installation, and durable structure make The Wall heater versatile in its features.

Advantages

- Compact, stylish and reliable heater for medium-sized sauna rooms
- The space-saving heater fits in a great variety of saunas
- Illuminated operating switches
- Option to choose right and lefthanded installation
- Option to integrate heater in the sauna bench



Features

Main material : Steel


H x W x D : 610.0 x 430.0 x 260.0 mm

Net weight (kg) : 11.7

Installation location : Wall

ID	GTIN	Output (kW)	Sauna room size min - max m3
HSW450400	6410082660254	4.5 kW	3.0-6.0

Related products




SFE-220400



HSW5



HSW5L



HSW1



HSW5




Spare parts

Product	ID	Pcs
Pilot lights The Wall, red	SPZWA-061	
Heating element support, The Wall	SPZWA-007	
Grid, The Wall heater	SPZWA-023	
Lead through rubber, The Wall	SPZWA-022	
Axle short, The Wall SW45/SW60	SPZWA-041	
Heating element 1500W 230V	SPY10-0016	3
Knob timer, The Wall SW45-90	SPZWA-011	1
Timer 4h	SPZSK-510-4	1
Thermostat overheating limiter switch	SPZSK-520	1
Timer + axle lock	SP641	1
Knob thermostat, The Wall SW45-80	SPZWA-021	1
Heating element 2260W 230V	SPZCU-823	1
Timer 4+8h	SPZSK-510	1
Knob timer, The Wall SW45-90	SPZWA-011-4	1

Technical details


Technical data	Type / attribute	HSW450400
	Color	Stainless Steel
	Power output	4.5 kW
	Stone sizes	Ø5-10 cm
	Stone amount (kg)	20
Dimensions	Product width	430
	Product height	610
	Product depth (mm)	260
	Net weight (kg)	11.7
	Gross weight	13.4
	Package width	460
	Package height	540
	Package depth	265
Safety and installation dimensions	Safety distance front (non-combustible materials)	20
	Safety distance front (combustible materials)	20
	Safety distance right side (combustible materials)	35
	Safety distance right side non-combustible materials	35
	Safety distance left side (combustible materials)	35
	Safety distance left side non-combustible materials	35
	Safety distance side (non-combustible materials)	35
	safety distance to the side wall (combustible materials)	35
	Safety distance (Ceiling)	1200
	Room min. height(depends on connections and therefore from output, star/delta)	1900
	Installation opening height	1900
	Installation opening width	500
	Installation opening depth	280

Technical images

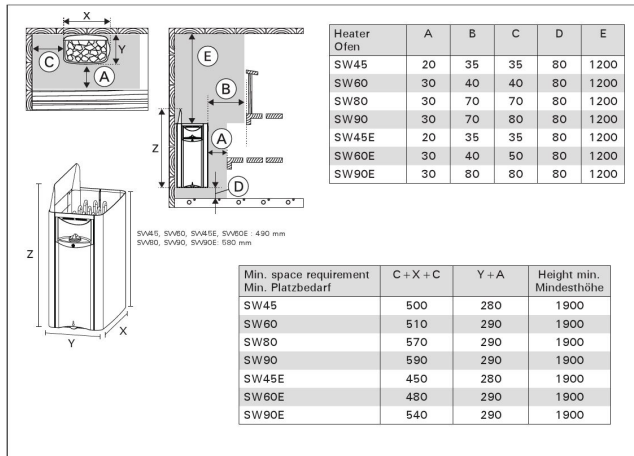

Minimum safety distances (all measurements in millimeters)

30

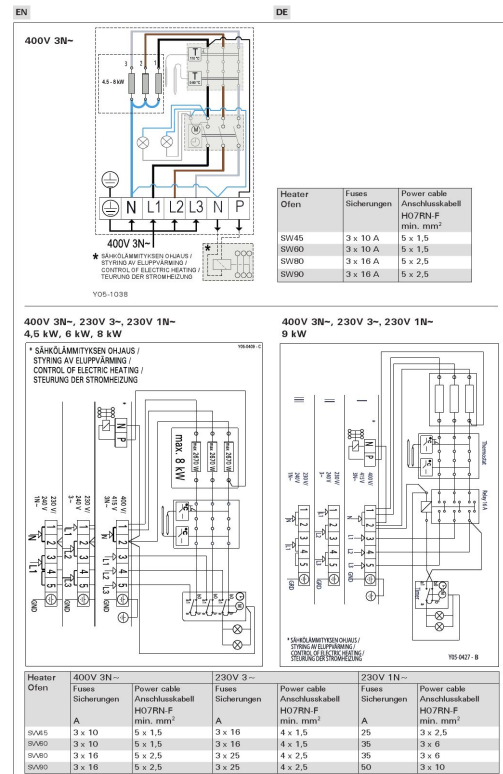Figure 11a. Electrical connections (SW45, SW60, SW80, SW90)
Abbildung 11a. Anschlussplan (SW45, SW60, SW80, SW90)